

Products

AS

Brand: ISARY

MODELS:

AS47A1536 AS47A1538
 AS47A7432 AS47C1538
 AS47C1554 AS47D1539
 AS57C1544 AS57C7446
 AS67A7466 AS67C7446
 AS67C7456



AS47A7432



AS47A1536



AS47C1538

Hydraulic Data

	Gear size	Nozzle pressure range	Factory setting
	47/57	7-14 bars	9 bars
	67	10-15bars	10 bars
Operating viscosity	2-12 mm ² /s (cSt)		
Oil temperature	0-60°C in the pump.		
Inlet pressure	2 bars max.		
Return pressure	2 bars max.		
Suction height	0.45 bars max. vacuum to prevent air separation from oil.		
Rated speed	3600 rpm max. (AS47,AS57) 2850 rpm max. (AS67)		
Torque(@45rpm)	0.10 N.m(AS47/57) 0.12 N.m(AS67)		

Solenoid valve characteristics

Voltage 220-240v or 110-120 or 24v; 50/60 Hz.

Add: No.198 Nanquan First term industrial zone, Wenling City, Zhejiang province, China.

Tel: 86-576-86122288

Fax: 86-576-86123232

Mob: 86-0-13335866678

QQ: 63905941


MSN:gcq_6605@hotmail.com

Email: isarypump@126.com


Http://www.isarypump.com

Consumption	9 W
Ambient temperature	0-60 °C
Maximum pressure	25 bars

Pump Capacity

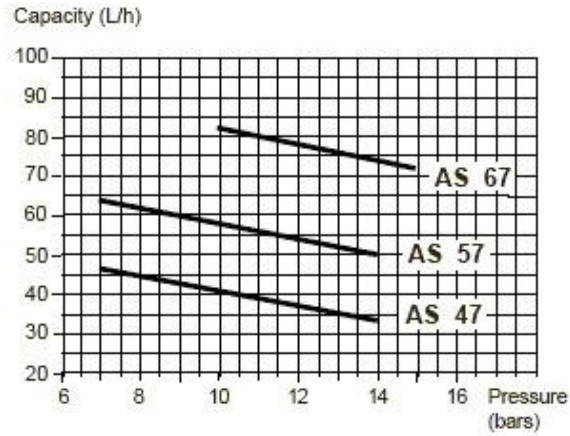

Pump Identification


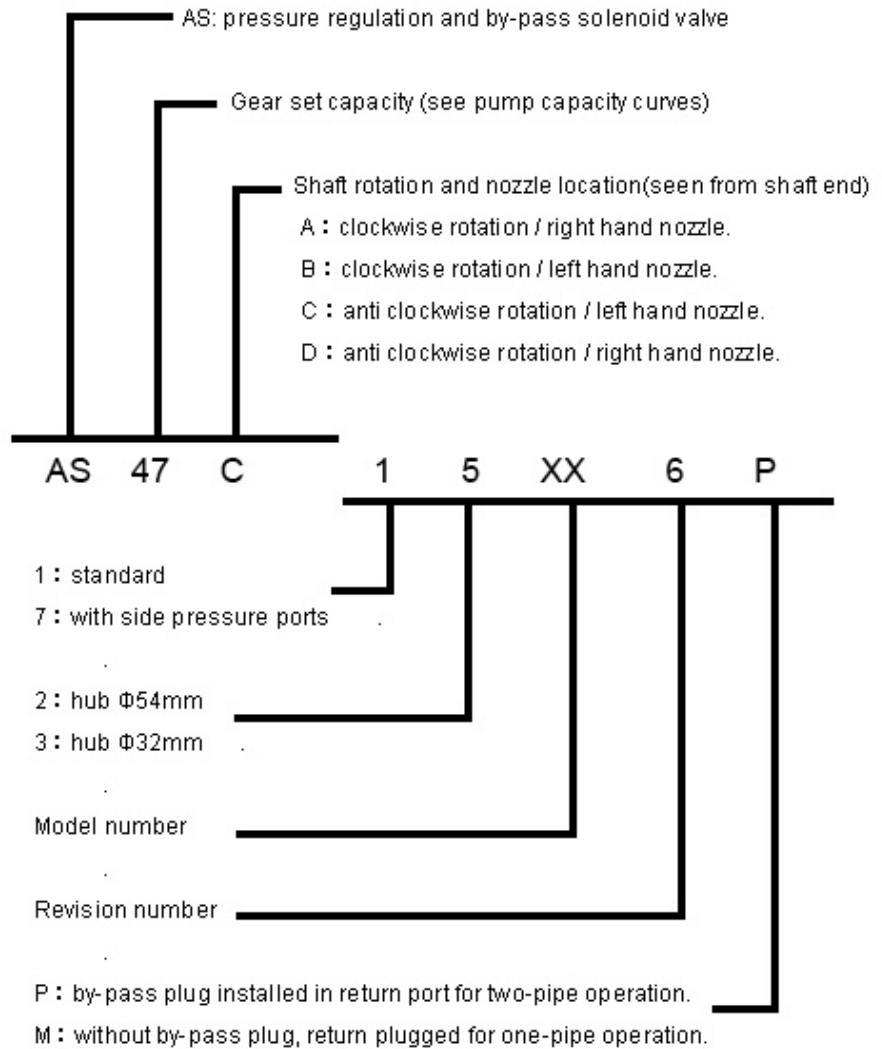


AS

PUMP DIMENSIONS


Examples show "C" rotation and nozzle outlet.

Pumps revision 1,3,5

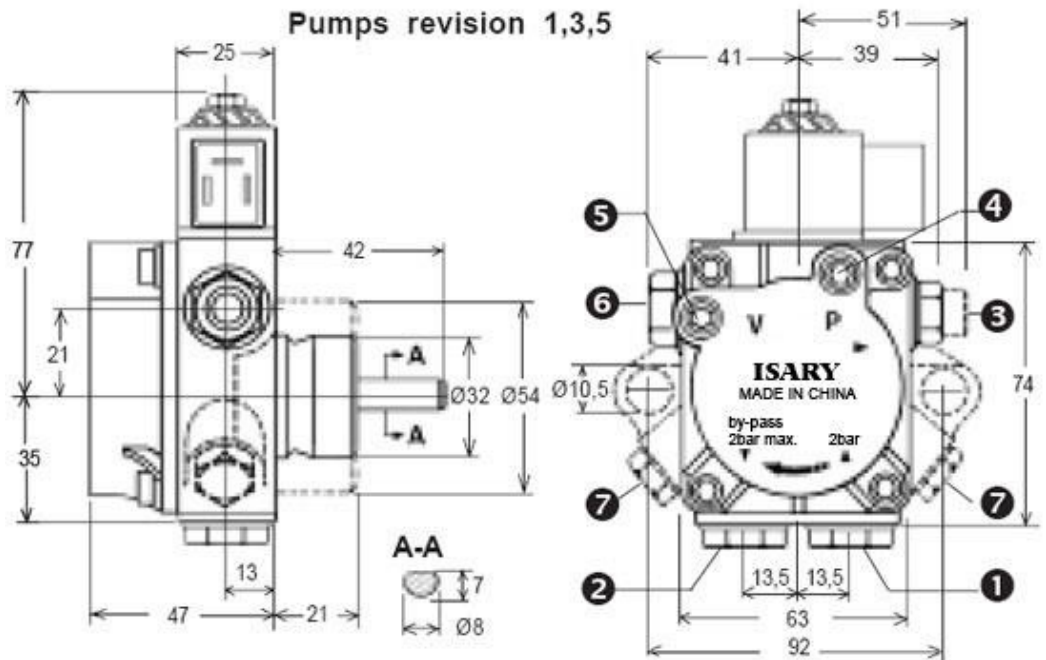

Inlet **1** and Return **2** with direct sealing for revision 5 and 6 models (sealing with washers can also be used)

Pumps revision 4,6

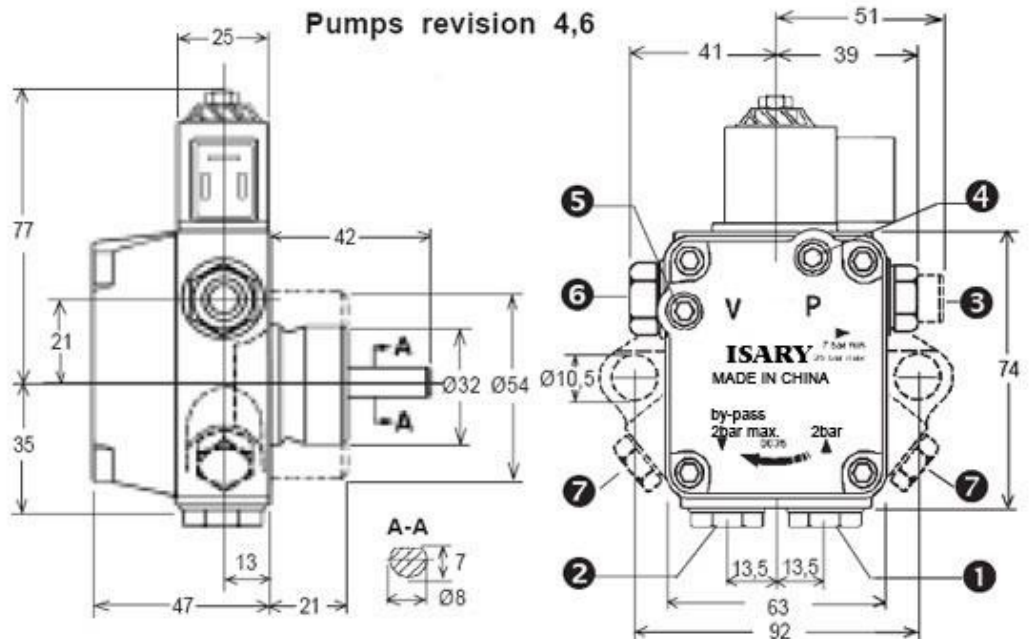

- | | | |
|---|------------------------------|---|
| 1 Suction | 4 Pressure gauge port | 7 Pressure port (only for "7000" series) |
| 2 Return and internal by-pass plug | 5 Vacuum gauge port | |
| 3 Nozzle outlet | 6 Pressure adjustment | |

Add: No.198 Nanquan First term industrial zone, Wenling City, Zhejiang province, China.

Tel: 86-576-86122288

Fax: 86-576-86123232

Mob: 86-0-13335866678

QQ: 63905941

MSN:gcq_6605@hotmail.com

Email: isarypump@126.com

Http://www.isarypump.com