

GWC Valve International

PROVEN TECHNOLOGY

FOR INDIVIDUAL

VALVE SOLUTIONS

WORLDWIDE




satesa
Sarandí Técnica

Panamá 2344 - B-1640-DKH - Martínez
Tinogasta 4380 - Q8304RTC - Neuquén
Tel: 54-11-4717-0123
www.autoquem.com.ar



USA HEADQUARTERS
GWC Valve International, Inc.
4301 Yeager Way
Bakersfield, CA 93313
Website: www.gwcvalve.com

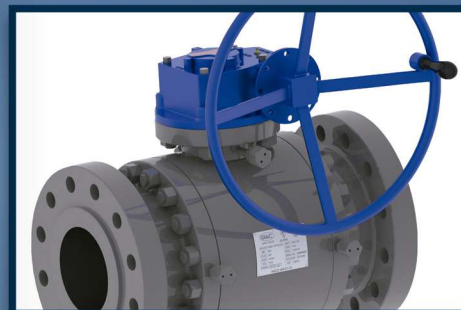

website: www.gwcvalve.com

CATALOG NUMBER PB-1006



Triple Offset Butterfly Valves

GWC line of Triple Offset Butterfly valves are available in a wide range of pressure class, materials and body configurations.

This product is designed for Bi-directional Bubble Tight Shutoff being fully engineered and manufactured to exceed our clients stringent process requirements.




SIZE RANGE: 2" - 30"
PRESSURE CLASS: ASME 150 - 600
API STANDARDS: 609

FEATURES

- ▶ TRIPLE ECCENTRIC DISC-SHAFT
- ▶ ANTI-BLOW OUT STEM
- ▶ BI-DIRECTIONAL
- ▶ FIRESAFE DESIGN
- ▶ LOW FRICTION BODY SEAT
- ▶ ZERO LEAKAGE
- ▶ WAFER, LUG & FLANGE TYPE

High Performance Butterfly Valves

GWC Double Offset High Performance Butterfly valves are designed for shutoff and throttling control of liquids and gas. We offer a full range of materials to suit your specific applications.

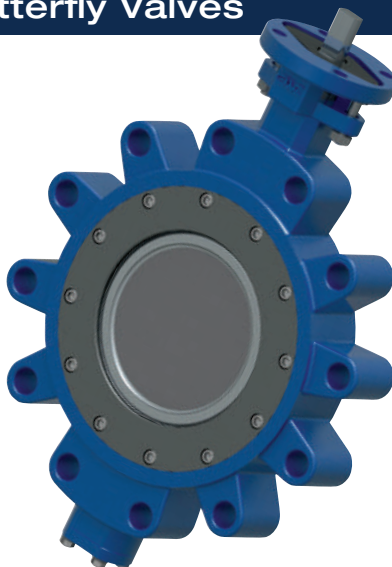

SIZE RANGE: 2" - 48"
PRESSURE CLASS: ASME 150 - 600
API STANDARDS: 609

FEATURES

- ▶ DOUBLE ECCENTRIC DISC-SHAFT
- ▶ ANTI-BLOW OUT STEM
- ▶ BI-DIRECTIONAL
- ▶ FIRESAFE DESIGN AVAILABLE
- ▶ LOW FRICTION BODY SEAT
- ▶ ZERO LEAKAGE WITH SOFT SEAT
- ▶ WAFER, LUG & FLANGE TYPE

Resilient Seated Butterfly Valves

GWC offers a full line of Resilient Seated Butterfly Valves designed for Oil & Gas, HVAC and Industrial applications. This product is economically priced for on/off and throttling services.



SIZE RANGE: 2" - 48"
PRESSURE CLASS: ASME 125 - 150
API STANDARDS: 609

FEATURES

- ▶ SINGLE ECCENTRIC DISC-SHAFT
- ▶ ANTI-BLOW OUT STEM
- ▶ BI-DIRECTIONAL
- ▶ ZERO LEAKAGE
- ▶ WAFER, LUG & FLANGE TYPE